



## GRAPE-SCENTED, FLOATING DEGREASER AND INDUSTRIAL SOLVENT DESCRIPTION:

Non-emulsifiable solvent degreaser quickly dissolves grease and oil on contact. Designed for lift station degreasing, asphalt release and removal, parts washing, and general degreasing. Powerful grape fragrance suppresses odours and waste fumes.

### BENEFITS:

- Safe to use -- non-toxic
- High flash point of 97°C
- Non-conductive -- dielectric strength of 42,900 volts
- Will not rust parts, components, or other metal surfaces
- Less aggressive than citrus terpene-based products on lift station components such as seals, pumps, and gaskets



### APPLICATION:

**LIFT STATIONS:** Pour directly into manhole or lift station pit. For best results, use sufficient quantities to assure a 2 to 4 inch cap on the surface. To create a 2cm cap in a 2 metre diameter lift station pit, add 100 litres.

**GENERAL CLEANING AND DEGREASING:** Apply by spraying, dipping, wiping, brushing, or soaking components until clean. Grrreat Grape will remove many oil-based and water-based soils.


**ASPHALT RELEASE AGENT:** Pre-spray truck beds and equipment for easier release of asphalt. Post-spray asphalt accumulated on shovels, rakes, and equipment to remove asphalt and coal patch.

**VAPOUR DEGREASING:** Submerge parts in dip tank allowing adequate soak time. Use through air automated system or dual dip system to achieve quicker drying times.

**SEPTIC TANKS/CESSPOOLS:** Add 1 litre per 20,000 litre capacity for dissolving grease as an initial treatment. Use 25 - 50 MLs per week for each 2000 litre capacity as preventative maintenance treatment.

**TOILETS AND URINALS:** Grrreat Grape can be applied with drip fluid dispensers to provide long-lasting daily odour control in urinals and toilets. Safe for use in waterless urinals.

**DRAIN MAINTENANCE:** Apply 400-800MLs of Grrreat Grape to drain lines each night to keep lines and traps free-flowing. Momar Maintain-It-All pumps are designed to dose the exact volume of Grrreat Grape at the exact time each day.

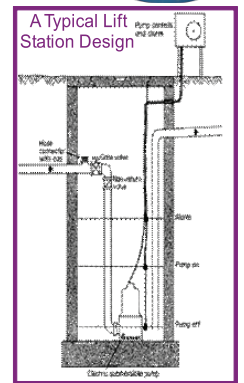

### SPECIFICATIONS:

|                                      |                                      |
|--------------------------------------|--------------------------------------|
| Density @ 25°C (ASTM-D-287).....     | 6.76 lbs/gal (0.81 g/mL)             |
| Appearance .....                     | Clear liquid with little to no color |
| Health/Flammability/Reactivity ..... | 1/1/0                                |
| Personal Protection .....            | B - safety glasses and gloves        |



**MOMAR AUSTRALIA PTY LTD**  
Telephone: +61 2 9831-4311 • Fax: +61 2 9831-2994  
www.momar.com.au